


FICHA TÉCNICA BRIDAS DE ACERO
RECUBIERTAS DE PP

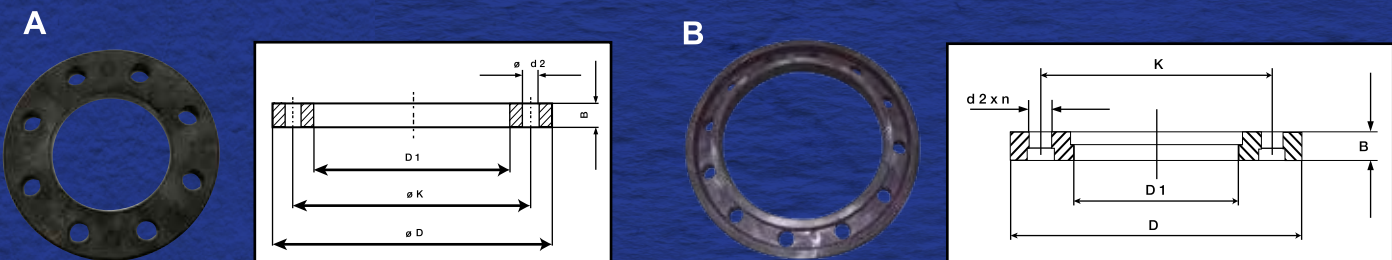

PE	PN [bar]	D [mm]	D1 [mm]	d2 [mm]	k [mm]	b [mm]	No. Agujeros	Tornillo. Métrico	Peso [gr]
20	10/16	95	27,5	14	65	12	4	M12	240
25	10/16	105	34,0	14	75	12	4	M12	310
32	10/16	115	42,0	14	85	16	4	M12	490
40	10/16	140	50,5	18	100	18	4	M16	710
50	10/16	150	61,5	18	110	18	4	M16	790
63	10/16	165	77,5	18	125	17	4	M16	900
75	10/16	185	91,5	18	145	18	4	M16	1170
90	10/16	200	108,0	18	160	20	8	M16	1360
110	10/16	220	128,0	18	180	20	8	M16	1700
125	10/16	220	135,0	18	180	20	8	M16	1480
140	10/16	250	158,0	22	210	24	8	M16	2340
160	10/16	285	178,0	22	240	24	8	M20	3550
180	10/16	285	188,0	22	240	24	8	M20	3220
200	10	340	235,5	22	295	24	8	M20	4580
200	16	344	234,5	22	295	28	12	M20	3220
225	10	340	238,0	22	295	24	8	M20	4230
225	16	344	238,0	22	295	28	12	M20	3300
250	10	395	287,5	22	350	30	12	M20	7200
250	16	410	287,5	26	355	33	12	M24	5350
280	10	395	293,5	22	350	30	12	M20	7150
280	16	410	294,0	26	355	33	12	M24	6300
315	10	445	337,5	22	400	34	12	M20	9440
315	16	467	337,5	26	410	40	12	M24	9700