


BAYLAN

WATER METERS

KK-2P

Single jet Dry type Water Meter

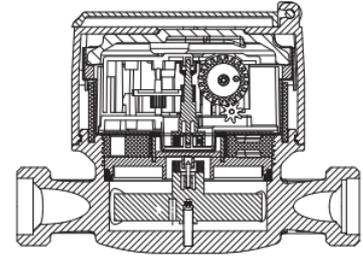



GENERAL

- MID and ISO 4064 Certified ratio 200
- Single jet design assures very high sensitivity even at low flows
- Suitable for potable water
- Body material in technical polymer
- Protection against external magnetic fields
- Remote reading pre-equipped
- 3 years of warranty
- 359° rotating dial
- 8 roller register
- Copper/glass register
- Suitable for cold water up to 50°C
- No maintenance
- Service and spare parts available for 10 years




PERFORMANCE DATA

Nominal Diameter	DN	15
Overload Flowrate	Q4	m ₃ /h 3,125
Permanent Flowrate	Q3	m ₃ /h 2,5
Transitional Flowrate	Q2	m ₃ /h 0,020 0,050
Minimum Flowrate		m ₃ /h 0,0125 0,03125
Q3/Q1 (MI-001 OIML R49)	-	200 80
Mounting on the network	-	H V
Maximum Registration Capacity	m ₃	99999,99
Maximum Working Pressure	bar	16
Maximum Working Temperature	°C	50
Pressure Loss	bar	0,63
Smallest Reading Resolution	m ³	0,02
Quantity per package -	-	10

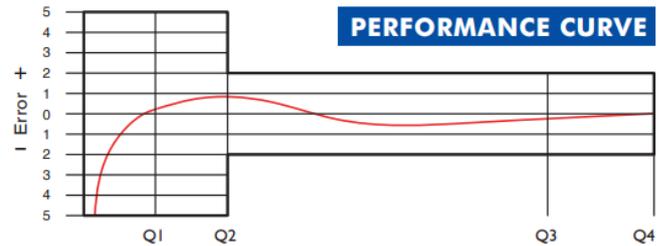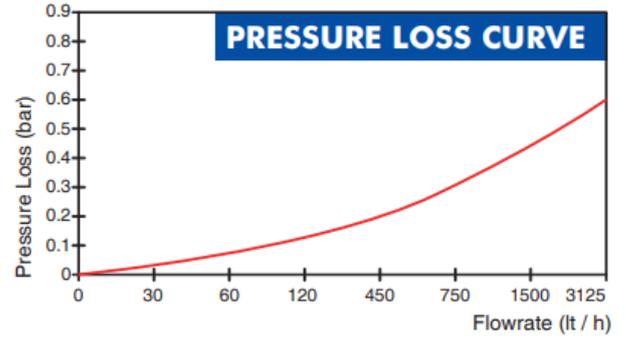

DIMENSIONS

Nominal diameter	DN	15	mm
Connecting diameter	D	G 3/4	B
Total overall meter height	H	85	mm
Axis height	h	15,8	mm
Length	L	110 115	mm
Length with connections	LB	190 195	mm
Width	B	78	mm
Unit weight		0,30	kg
Package Weight (without connect)		4,00	kg
Package Weight (with connect)		6,00	kg
Package dimensions		21x43x17	cm

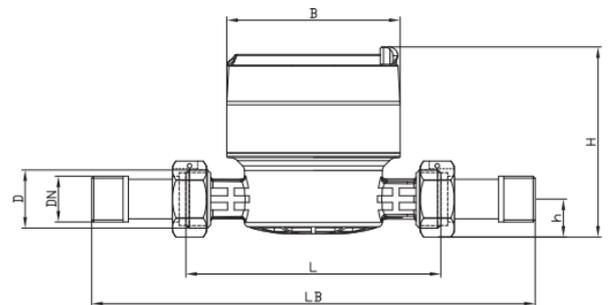

"Due to continuous development of our products, we reserve the right to modify our product design or construction without prior notice."